


The porous u-type steel wire frame is widely used in the electrical value, mobile, China Unicom, Netcom, Tietong and other telecom operators machine room. Base station and its hall has the wiring management function. And the role of swinging all the cable ladder is the light, five types of wire, cable, pipe cable erection to achieve the accurate necessary engineering appliances this product meets the requirements of the information industry SB. Select high quality steel surface for the main material of full open bridge (outdoor). With a large weight and generous appearance. Cutting corrosion, etc.

#### Introduction

**U channel cable ladders are made from steel, wmcn is used in data center communication room. It has following features:**

- 1.Lower ccst**
- 2. Easy for installation**
- 3.Loading capacity can be up to 200KG per meter**
- 4.Powder coating in different colors or HDG**
- 5.Ladder's Width from 200mm to1000mm**
- 6.2.5 meters per length**

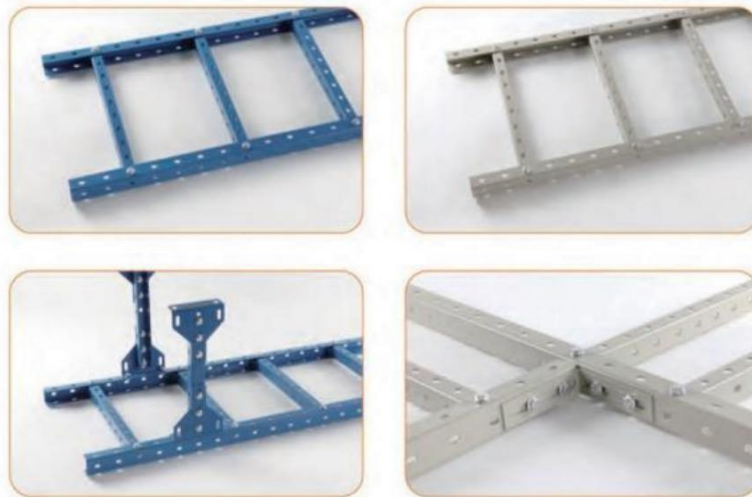

**QKCU200\*1000**

名称:200~1000mm多孔U型钢走线架

Name: 200-1000mm U-CHANNEL CABLE LADDER

(1) Adjust with hole u-shaped steel. Letter, double room. Vertical alignment. Line up horizontally. Any combination; (2) a spacing of 250mm. 1.5m2m; (3) porous U-shaped steel wire frame is assembled with special accessories. Convenient transportation: (4) the porous U-shaped steel Egypt walking and Egypt frame can be installed with ceiling, wall sticking installation, cabinet top installation and electrostatic floor installation. It can also be used as a magic ladder


**QKCU-ZL**

名称:主梁

Name: U channel Girder

Porous U-shaped steel wire frame uses high quality cold pole decay and spray 8L each


2.5 meters. Horizontal x 31mm x 2mm.

**QKCU-HD**

名称:横档

Name: U channel Bar

Porous hole U-type steel wire frame adopts high quality cold plate I face Dft. Dun 35mm x 26mm x 2mm.



**QKCU-CNT**

名称:u型连接片

Name: U channel Connector

Description

purpose: used for the fixation and connection of the straight section characteristics: two pieces are a set of 2 levels for each connectionpoint

**Apply to. Connect girders**

**CU-L100**

名称: 100L型件 Name:

L100Connector

Description

Use: used for porous u-shaped steel wire frame three links, four links at the connection characteristics: convenient installation, good load-bearing.

**Apply to Connect two girders**

**CU-L50**

名称:50L型件

Name: L50Connector

Description

Use: for porous u-shaped steel wire frame directly fixed to the wall characteristics: convenient installation, good load-bearing

**CU-BTF**

名称: 蝴蝶板

Name: Butterflyholder

Description

Describe the use for the fixing of the ceiling and the main beam for the U-type steel suspension during installation, or for the connection at the three and four links. Features convenient and fast installation.

**Apply to:** Hold the ladder and fix on to the ceiling

